



Product Overview

The RBC-D4E camera is a ruggedized and compact High Definition color digital video camera. The camera is well protected inside an environmentally sealed aluminum housing, finished in Lusterless Desert Tan and with a scratch resistant sapphire window. The housing provides complete EMI protection, and can “breathe” through a humidity filter, minimizing maintenance requirements during long term storage.

The camera has a dual concurrent legacy analog (NTSC/PAL) video output, which allows the cameras to support legacy installations with a path to digital high definition video output.

The concurrent SDI video output supports SMPTE standards supporting 1080p60, 1080p50, 1080p24, 1080i60, 720p60, 720p30 digital video output modes.

Typical Applications

- Suitable for both water based, ground and air vehicles
- Remote Mission viewing
- Mission Recording and Analysis

Features and Electrical Specifications


- Sony IMX265 Electronic Global Shutter sensor.
- SDI digital output supporting 3G-SDI (3.0Gbps) and HD-SDI (1.5 Gbps)
- Lens mount supporting a wide array of C and CS mount lenses
- Primary SDI digital video output
 - SMPTE 424M 3Gbps SDI video output support ing 1080p30fps video
 - SMPTE 292M 1.5 Gbps SDI video output support ing 1080p30 video output
- secondard video output
 - NTSC or PAL selectable video output
- 12V DC power input
- 3.5-4.0 W power consumption depending on video output mode
- 5.5mm lens - other lens options available

RBC-D4E



Ruggedized Puck Camera

Ordering# 800-0000681-000

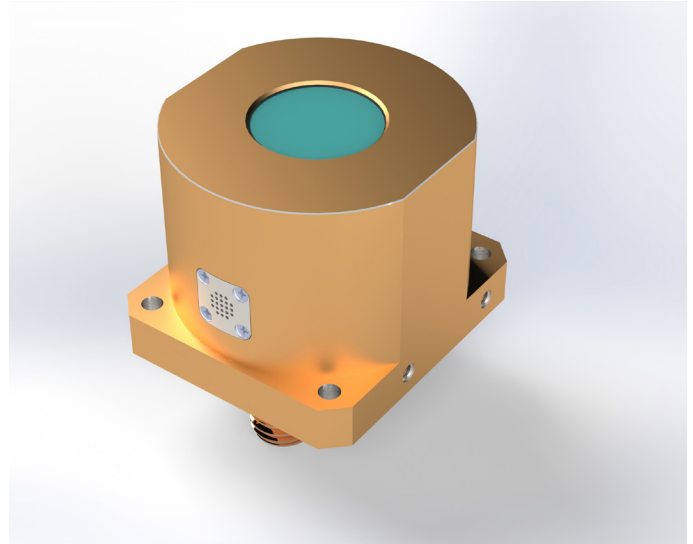

Environmental Specifications*

- Storage Temperature -55°C to +80°C
- Storage Humidity 5% to 95% RH, non-condensing
- Operating Temperature -40°C to +70°C
- Operating Humidity 5% to 95% RH, non-condensing
- Altitude -15,000 to 60,000 ft+

*Estimates based on similar products, which have been tested



NOTICE: ALL RIGHTS RESERVED. THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF SEKAI ELECTRONICS, INC. NEITHER RECEIPT NOR POSSESSION OF THIS DOCUMENT CONSTITUTES AN AUTHORIZATION TO REPRODUCE, COPY, OR TRANSMIT IN ANY FORM OR BY ANY MEANS, WITHOUT WRITTEN AUTHORIZATION FROM SEKAI ELECTRONICS, INC.

NOTE: UNLESS OTHERWISE SPECIFIED
WEIGHT: NOT TO EXCEED 380 GRAMS (0.84LBS)

